



Merely illustrative image

AIR CONDITIONING

SPLITS - SKIRT

CC160W

CC165W


CC175W

Best relationship between

Weight x Performance

Reliability

Thermal Comfort




Technical Data				
Characteristics		CC160W	CC165W	CC175W
Maximum Capacity		60.000 BTU/h (17,5 kW)	65.000 BTU/h (19 kW)	75.000 BTU/h (22 kW)
Flow of Evaporator		2.200 m³/h	3.300 m³/h	3.300 m³/h
Flow of Condenser		2.900 m³/h	5.800 m³/h	5.800 m³/h
Units Weight ¹		43 Kg	53 Kg	53 Kg
Refrigerant Gas ²		R134a - 2,0 Kg	R134a - 2,5 Kg	R134a - 2,5 Kg
Compressor Weight ³		5,1 kg	5,1 kg	9,5 kg
Compressor		TM21 - 215 cm³	TM21 - 215 cm³	TM31 - 313 cm³
Dimension L x W x H (mm)	Evaporator	1110 x 355 x 266	1550 x 450 x 242	1550 x 450 x 242
	Condenser	1218 x 497 x 265	1218 x 497 x 265	1218 x 497 x 265

- 1- Weight of units without integrated heating system.
2- Gas load values vary according to application.
3- Compressor weight without clutch.


Evaporator
CC160W



Evaporator
CC165W/CC175W

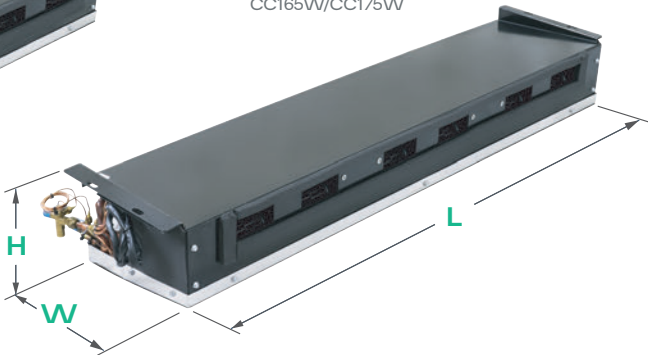

Condenser
CC160W

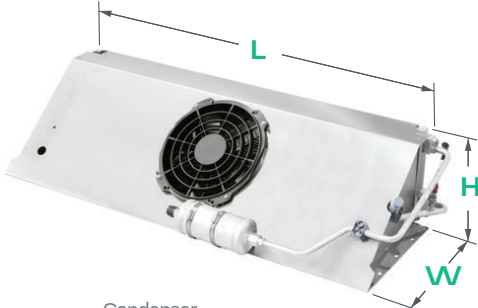

Condenser
CC165W/CC175W



Characteristics

- High cooling capacity
- High airflow
- Low noise
- Low operational cost
- Easy maintenance
- Produced from sustainable material
- Evaporator with up to 3 blowers
- Condenser with up to 2 Fans

Application

- Minibus
- Roadbus
- Citybus
- Coaches

Technical Features			
Digital Electronic Control • Smart commands • Automated control (keeps the AC at the programmed temperature) • Fresh air flap manually or automatically controlled • Alarms for fault diagnosis	Relay Board • High reliability • Easy maintenance	Compressor • High performance • Long durability	Blower/Fan • Low noise • High performance • Long durability



SPHEROS Climatização do Brasil - Veículos Comerciais S/A
 Av. Rio Branco, 4688 - Bairro São Cristóvão | CEP 95060-145 | Caxias do Sul - RS - Brasil | Tel. +55 (54) 2101.5700
 www.spheros.com